

paper

by Xubi Khan

Submission date: 15-Feb-2023 10:17PM (UTC+0500)

Submission ID: 2014922680

File name: Highlighted_without_details.pdf (562.53K)

Word count: 5646

Character count: 30008

Analysis and Numerical Simulation of Fractal-Fractional Order Non-Linear Couple Stress Nanofluid with Cadmium Telluride Nanoparticles

Abstract

It is generally considered that fractal-fractional order derivative operators are highly sophisticated mathematical tools that can be applied in a variety of physics and engineering situations to obtain real solutions. By using fractal-fractional derivatives, we can simultaneously investigate fractional order and fractal dimension. Due to extensive applications of fractal-fractional derivatives, in the present article fractal-fractional order model of non-linear Couple stress nanofluid has been analyzed. The homogenous mixture of base fluid and nanoparticles has been formed by the uniform dispersion of cadmium telluride nanoparticles in mineral transformer oil. Primarily, the classical mathematical model has been formulated via relative constitutive equations and then generalized by using fractal-fractional derivative operator. This model has been numerically solved using Crank-Nicolson technique. Using numerical solutions, various graphs are plotted to analyze how physical parameters alter Couple stress nanofluid rheology. As can be seen from the graphical study, couple stress slows down fluid velocity. Adding cadmium telluride nanoparticles to transformer oil increased its efficacy by 15.27%.

Keywords Fractal-fractional derivative; Couple stress fluid; Cadmium telluride nanoparticles; Mineral transformer oil; Crank-Nicolson scheme.

1. Introduction

A nanofluid can simply be defined as a mixture of two-phase solid particles dispersed in a fluid, such as water, air, oils, etc., within nanoscales. It has been apparent for a long time that the scientific community has been trying to improve the qualities of various liquids, and they have also been trying to correct the insufficiencies of these liquids. A millimeter sized metallic particle and a micron sized metallic particle were used in this study by researchers and analysts. To improve thermal conductivity, Maxwell proposed spreading metallic particles in normal base fluids (Maxwell James C., 1873). Clogging, channel erosion, and sedimentation are among issues that it faces. By introducing micro-sized solid particles to the base fluids, Masuda et al. studied the heat transfer rate of the fluids and their thermal properties, but they ran into the same problems as Maxwell's theory in their studies (Masuda et al., 1993). Later on, Hamilton-Crosses (L., 1962)

extended Maxwell's work and came up with a more accurate solution based on Maxwell's idea. The first time nano-sized particles were used in base liquids was done by Choi (Choi and Eastman, 1995) in 1995, and he was the first experimentalist to do so. It is recommended that the volume fraction is restricted to a range ranging from 0.0 to 0.04 in order to avoid the formation of sedimentation and clogging problems that can arise if we increase the number of nanoparticles. The use of nanoparticles in base liquids has been identified to boost thermal conduction and heat transfer rates, according to many studies. There will be a disturbance in the flow of fluid as a result of this. In addition to enhancing the properties of conventional liquids, these additives are also able to enhance their thickness, lubricity, breakdown voltage, and dielectric strength. The thermal conduction of such liquids and the rate of heat transfer within them are quite limited. By disbanding graphene and molybdenum disulfide in the base liquid, Arif *et al.* investigated the heat transmission rate (Arif *et al.*, 2019). Khan *et al.* examined at the homogeneous and heterogeneous chemical processes that happen in nanofluid as it moves through a channel. The authors also considered the effects of bioconvection in their research (Khan and Puneeth, 2021). Rasheed *et al.* (Rasheed *et al.*, 2021) studied nanofluid MHD flow in the presence of Newtonian heating, advection energy, and convective conditions. The stationary magnetic field was also taken into account by the researchers. Shahzad *et al.* examined Jeffrey nanofluid flow driven to Lorentz force and viscous dissipation. They found in their study that Graphene-based nanofluid has greater temperature than regular fluid (Shahzad *et al.*, 2021). few important and significant studies on nanofluid's application can be found in (Hasin *et al.*, 2022; Murtaza *et al.*, 2020).

The traditional Navier-Stokes principle cannot capture the exact behavior of some liquids, such as polymeric liquids, colloidal suspensions, liquids containing added substances, and liquids composed of arbitrarily positioned particles. Analysts presented numerous models to investigate the properties of these fluids. Stokes' (Stokes and Stokes, 1984) developed the couple stress theory for liquids that differ from traditional Newtonian viscous liquids in a number of ways. Couple stress theory, which includes couple stress, antisymmetric stress tensor, and body couples, is more broad than Newtonian viscous fluid theory. These kinds of fluids contain haphazardly arranged and unbending particles. Couple stresses' major objective is to define the size impact of these liquids, which cannot be adequately represented by Newton's fluid theory. CSF is a viscous liquid containing irregularly shaped and stiff particles such as liquid crystals, lubricants, blood, and other materials. It is characterised as a couple stress tensor when the spin field upshots in an

antisymmetric stress tensor are due to the rotation of free moving particles in an antisymmetric stress tensor. This points us to the idea of couple stresses. By studying these fluids, it is possible to explain the behavior of numerous polymer suspensions, lubricants, liquid crystals, and other materials. Because of these properties, other researchers have used CSF to investigate the characteristics of various fluids. As an example, Srivastava examined the behaviour of blood flow passing through a stenotic blood vessel by considering blood to be a fluid in a couple of stresses (Biomechanics and 1985, n.d.). After increasing the couple stress parameters, he discovered that there was an increase in resistance to blood flow and wall shear stress when he increased the couple stress parameters. A comparison has also been made between the results of the experiment and the Newtonian fluid model. There is a finding that the wall shear stress and blood flow are higher for the couple stress fluid model than for the single stress fluid model. A penetrating catheter filled with microscopic gold particles was used to study blood flow as CSF via blocked arteries of the heart (Ellahi et al., n.d.). They discovered that gold particles enclose big molecules that deliver medications to the organ's damaged area. Couple-stresses have an impact on lubrication challenges when additives are applied or if the lubricant comprises long-chain molecules. Couple-stresses of this nature have the potential to have a major influence on bearing behaviour in practise. Lin examined the CSF properties of lubricated journal bearings owing to the lubricant combined with various additives (International and 1998, n.d.). According to him, CSF boosts the load-carrying capacity and improves the journal-bearing properties of bearings as well as producing more apparent effects than Newtonian lubricants in terms of their benefits to bearings. In a recent study, Naduvinamani et al. (Naduvinamani and Kashinath, 2006) investigated the interaction between rough surfaces and the lubrication of a porous journal bearing using CSF to serve as the lubricant. During their study, they discovered that roughness in a fluid has a greater impact on its bearing properties than smoothness in a Newtonian fluid. Several stress fluid models of blood flow through a stenosed tube have been developed (Pralhad and Schultz, 2004). A few further applications were discussed as well, such as polycythemia, plasma cell dichasia, and sickle cell disease, where their study was applied. By increasing the stress parameters of a porous channel within a micro-circulatory system, Tripathi (Tripathi, 2011) observed that pressure was reduced by reducing peristaltic blood flow as CSFF through a porous channel. CSF flow is also being used in modern technologies and modern medicine for a number of additional purposes, including biomedicine

(Ramesh et al., n.d.), digestive issues (Shit et al., n.d.), gland tumors, and arthritis (Hussain et al., n.d.).

The mathematics of fractional calculus involves derivatives and integrals with arbitrary orders. The concept of fractional calculus extends the classical notion of derivatives and integrals to non-integer orders, which allows for the modeling of complex phenomena and processes with memory and hereditary effects. This field has applications in a wide range of areas, including physics, engineering, finance, and biology (Ahmad et al., 2021; Almalahi et al., 2021b, 2021c, 2021a; Atangana, 2017; Atangana and İğret Araz, 2020; Atangana and Qureshi, 2019). Fractional calculus has several important applications in various fields such as physics, engineering, finance, and biology. Some of the significant uses and practical applications of fractional calculus are: Fractional calculus allows for the modeling of complex systems, such as viscoelastic materials, electrical circuits, and fluid flow, that exhibit memory and non-local behavior. Fractional calculus has been used in control and optimization theory, particularly in fractional order PID controllers and fractional optimization algorithms. Fractional calculus has been used in the design of fractional-order filters for signal processing, which can provide improved performance over traditional integer-order filters in some applications. Fractional calculus has been applied in financial mathematics, where it has been used to model the behavior of stock prices, interest rates, and other financial instruments. Fractional calculus has also been used to model biological processes, such as the spread of diseases, blood flow, and the mechanics of biological tissues. These are some of the most significant applications of fractional calculus, but there are many more areas where it is used to provide more accurate and comprehensive models (Abro and Atangana, 2020; Heydari, 2020; Murtaza et al., 2022a).

According to the author, the literature on the flow of couple-stress fluid through an open channel is very rare, and none has addressed the flow of couple-stress nanofluid (CSNF) with viscous dissipation and time-dependent boundary conditions. It is because of this reason that the present study determines the effect of mass and heat transfer, viscous diffusion, and time-dependent boundary conditions on CSNF flow. The problem is modelled in terms of highly non-linear integer order coupled PDEs which is then transformed to the fractal-fractional model by incorporating time derivative with time fractal-fractional derivative. Due to the difficulty of solving such non-linear problems, Crank-Nicolson technique are used through Mathematica. The

graphical and numerical results are portrayed through different graphs and tables and discussed in detail.

2. Formulation of Mathematical Model

Using a microchannel of length l , we studied nonlinear fractal-fractional Couple stress nanofluid. We have also taken into account the effect of viscous dissipation and the external pressure gradient as part of our analysis. The initial assumption is that fluid and plates will remain static at ambient temperature and concentration for a fixed period of time. The left plate of the fluid is disturbed by a velocity of magnitude U at the time $\tau > 0$, and this motion is transmitted by the fluid to the right plate. When t becomes greater than 0, the temperature of the fluid as well as the concentration of the fluid rises to $T_s + (T_p - T_s)A\tau$ and $C_s + (C_p - C_s)A\tau$ respectively.

Figure 1 illustrates the geometric representation of the problem in more detail.

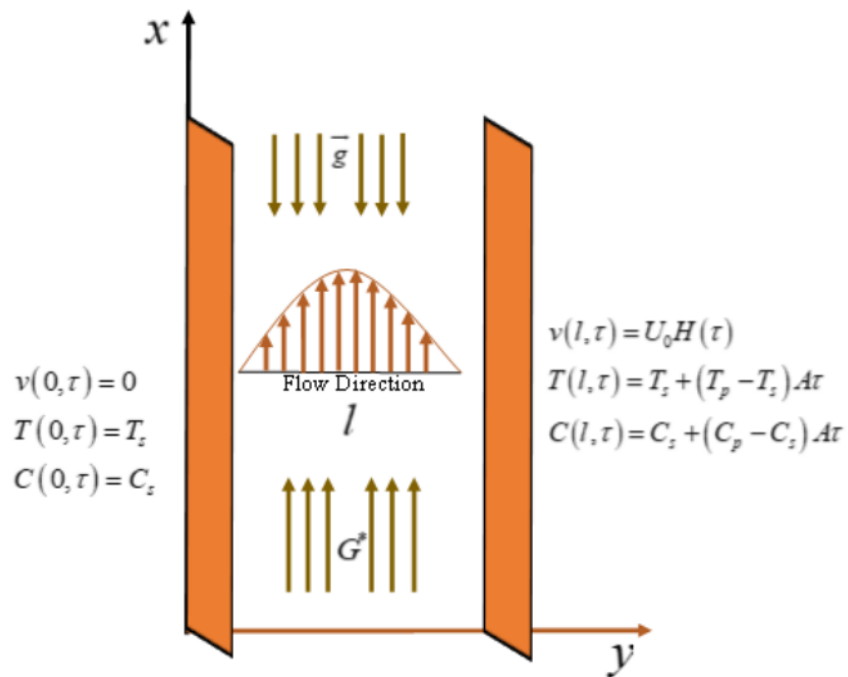


Fig.1: Geometrical Illustration of the Model

For nanofluid model the governing equations are given as (Akhtar and Shah, 2018; Ali et al., 2020a):

$$\rho_{nf} \frac{\partial v(y, \tau)}{\partial \tau} = G^* + \mu_{nf} \frac{\partial^2 v(y, \tau)}{\partial y^2} - \eta \frac{\partial^4 v(y, \tau)}{\partial y^4} + g(\rho\beta_T)_{nf} (T(v, \tau) - T_0) + g(\rho\beta_C)_{nf} (C(v, \tau) - C_0), \quad (1)$$

$$(\rho C_p)_{nf} \frac{\partial T(y, \tau)}{\partial \tau} = k_{nf} \frac{\partial^2 T(y, \tau)}{\partial y^2} + \mu_{nf} \left(\frac{\partial v}{\partial y} \right)^2, \quad (2)$$

$$\frac{\partial C(y, \tau)}{\partial \tau} = D_{nf} \frac{\partial^2 C(y, \tau)}{\partial y^2}, \quad (3)$$

IBCs are:

$$\left. \begin{aligned} v(y, 0) &= 0, & T(y, 0) &= T_s, & C(y, 0) &= C_s, \\ v(0, \tau) &= 0, & T(0, \tau) &= T_s, & C(0, \tau) &= C_s, \\ v(l, \tau) &= Uf(\tau), & T(l, \tau) &= T_s + (T_p + T_s)A\tau, & C(l, \tau) &= C_s + (C_p + C_s)A\tau, \end{aligned} \right\} \quad (4)$$

Nanofluid correlations are given as (Ali et al., 2020b; Murtaza et al., 2020).

$$\begin{aligned} \mu_{nf} &= \mu_{TO} (1 - \varphi_{CT})^{-2.5}, & D_{nf} &= D_{TO} (1 - \varphi_{CT}), & \rho_{nf} &= (1 - \varphi_{CT})\rho_{TO} + \varphi_{CT}\rho_{CT}, \\ (\rho\beta_T)_{nf} &= (\rho\beta_T)_{TO} (1 - \varphi_{CT}) + \varphi_{CT} (\rho\beta_T)_{CT}, & (\rho\beta_C)_{nf} &= (\rho\beta_C)_{TO} (1 - \varphi_{CT}) + \varphi_{CT} (\rho\beta_C)_{CT}, \\ (\rho C_p)_{nf} &= (1 - \varphi_{CT})(\rho C_p)_{TO} + \varphi_{CT} (\rho C_p)_{CT}, & k_{nf} &= k_{TO} \left[\frac{k_{CT} + 2k_{TO} - 2\varphi_{CT} (k_{TO} - k_{CT})}{k_{CT} + 2k_{TO} + \varphi_{CT} (k_{TO} - k_{CT})} \right]. \end{aligned}$$

$$\sigma_{nf} = \sigma_{TO} \left[1 + \frac{3 \left(\frac{\sigma_{CT}}{\sigma_{TO}} - 1 \right) \varphi_{CT}}{\left(\frac{\sigma_{CT}}{\sigma_{TO}} + 2 \right) - \left(\frac{\sigma_{CT}}{\sigma_{TO}} - 1 \right) \varphi_{CT}} \right],$$

Following are the dimensionless variables:

$$\left. \begin{aligned} \zeta &= \frac{y}{\ell}, & u^* &= \frac{u}{U_0}, & t &= \frac{U_0 \tau}{\ell}, & \lambda &= \frac{\eta}{\mu_f \ell^2}, \\ P &= \frac{\ell^2}{\mu_f U_0} G^*, & \Theta &= \frac{T - T_s}{T_p - T_s}, & \Phi &= \frac{C - C_s}{C_p - C_s}, \end{aligned} \right\} \quad (5)$$

Using these dimensionless entities, the governing equations will be;

$$\frac{\partial u(\zeta, t)}{\partial t} = G - \mathfrak{R}_1 \frac{\partial^2 u(\zeta, t)}{\partial \zeta^2} - \eta \frac{\partial^4 u(\zeta, t)}{\partial \zeta^4} + Gr \Theta(\zeta, t) + Gm \Phi(\zeta, t), \quad (6)$$

$$\frac{\partial \Theta(\zeta, t)}{\partial t} = \frac{1}{h_2} \frac{\partial^2 \Theta(\zeta, t)}{\partial \zeta^2} + \psi \left(\frac{\partial u(\zeta, t)}{\partial \zeta} \right)^2, \quad (7)$$

$$\frac{\partial \Phi(\zeta, t)}{\partial t} = \mathfrak{J} \frac{\partial^2 \Phi(\zeta, t)}{\partial \zeta^2}, \quad (8)$$

and

$$\left. \begin{aligned} u(\zeta, 0) &= 0, & \Theta(\zeta, 0) &= 0, & \Phi(\zeta, 0) &= 0, \\ u(0, t) &= 0, & \Theta(0, t) &= 0, & \Phi(0, t) &= 0, \\ u(1, t) &= 1, & \Theta(1, t) &= t, & \Phi(1, t) &= t, \end{aligned} \right\} \quad (9)$$

here

$$\begin{aligned} G &= \frac{P \mu_{TO} U}{\ell^3 \rho_{TO} n_1}, & \mathfrak{R}_1 &= \frac{\mu_{TO} n_2 U}{\ell^3 \rho_{TO} n_1}, & \eta &= \frac{\lambda \mu_{TO} U}{\ell^3 \rho_{TO} n_1}, & Gr &= \frac{(\rho \beta_T)_{TO} n_3 (T_p - T_s)}{\ell \rho_{TO} n_1}, \\ Gm &= \frac{(\rho \beta_C)_{TO} n_4 (C_p - C_s)}{\ell \rho_{TO} n_1}, & Pr &= \frac{(\mu C_p)_{TO}}{K_{TO}}, & E_c &= \frac{\nu_{TO} U}{(C_p)_{TO} (\Theta_p - \Theta_s) \ell}, \\ Re &= \frac{U \ell}{\nu}, & h_2 &= \frac{Pr Re m_1}{m_2}, & \psi &= \frac{E_c n_2}{m_1}, & Sc &= \frac{\nu_{TO}}{D_{TO}}, & \mathfrak{J} &= \frac{(1 - \varphi)}{Sc Re}, \end{aligned} \quad (10)$$

$$n_1 = (1 - \varphi) + \frac{\varphi \rho_{CT}}{\rho_{TO}}, \quad n_2 = (1 - \varphi)^{-2.5}, \quad n_3 = (1 - \varphi) + \frac{\varphi (\rho \beta_T)_{CT}}{(\rho \beta_T)_{TO}},$$

$$n_4 = (1 - \varphi) + \frac{\varphi (\rho \beta_C)_{CT}}{(\rho \beta_C)_{TO}}.$$

The classical model given in equations (6)-(8) are transformed into fractal-fractional model by simply incorporating the time fractal-fractional derivative with ordinary time derivative and addressed as following:

$${}^{FF}D_t^\alpha u(\zeta, t) = \beta t^{\beta-1} \left\{ G - \Re_1 \frac{\partial^2 u(\zeta, t)}{\partial \zeta^2} - \eta \frac{\partial^4 u(\zeta, t)}{\partial \zeta^4} \right\} - \frac{u(\zeta, 0)}{\Gamma(1-\alpha)} t^{-\alpha}, \quad (11)$$

$${}^{FF}D_t^\alpha \Theta(\zeta, t) = \beta t^{\beta-1} \left\{ \frac{1}{h_2} \frac{\partial^2 \Theta(\zeta, t)}{\partial \zeta^2} + \psi \left(\frac{\partial u(\zeta, t)}{\partial \zeta} \right)^2 \right\} - \frac{\Theta(\zeta, 0)}{\Gamma(1-\alpha)} t^{-\alpha}, \quad (12)$$

$${}^{FF}D_t^\alpha \Phi(\zeta, t) = \beta t^{\beta-1} \left\{ \Im \frac{\partial^2 \Phi(\zeta, t)}{\partial \zeta^2} \right\} - \frac{\Phi(\zeta, 0)}{\Gamma(1-\alpha)} t^{-\alpha}, \quad (13)$$

Incorporating initial conditions in equations (11)-(13), we get:

$${}^{FF}D_t^\alpha u(\zeta, t) = \beta t^{\beta-1} \left\{ G - \Re_1 \frac{\partial^2 u(\zeta, t)}{\partial \zeta^2} - \eta \frac{\partial^4 u(\zeta, t)}{\partial \zeta^4} \right\} + Gr\Theta(\zeta, t) + Gm\Phi(\zeta, t) \quad (14)$$

$${}^{FF}D_t^\alpha \Theta(\zeta, t) = \beta t^{\beta-1} \left\{ \frac{1}{h_2} \frac{\partial^2 \Theta(\zeta, t)}{\partial \zeta^2} + \psi \left(\frac{\partial u(\zeta, t)}{\partial \zeta} \right)^2 \right\}, \quad (15)$$

$${}^{FF}D_t^\alpha \Phi(\zeta, t) = \beta t^{\beta-1} \left\{ \Im \frac{\partial^2 \Phi(\zeta, t)}{\partial \zeta^2} \right\}. \quad (16)$$

Here ${}^{FF}D_t^{\alpha, \beta}$ is the fractal-fractional operator (Atangana, 2017) and expressed as;

$${}^{FF}D_t^{\alpha, \beta} \delta(t) = \frac{\Pi(\alpha)}{\Gamma(1-\alpha)} \frac{d}{dt^\beta} \int_0^t \delta(\zeta) \exp\left\{-\frac{\alpha}{1-\alpha}(t-\zeta)\right\} d\zeta, \quad 0 < \alpha, \beta \leq 1. \quad (17)$$

Eq. (17) follows the following property;

$$\Pi(0) = \Pi(1) = 1.$$

The finite difference technique can be used to discretize the first order fractal-fractional order derivative as:

$${}^{FF}\mathcal{D}_\tau^\alpha \delta(\zeta, \tau) = \beta \tau^{\beta-1} \frac{\Pi(\alpha)}{2\alpha} \left\{ \frac{\delta_i^{j+1} - \delta_i^j}{\lambda} + \sum_{j=1}^m \left(\frac{\delta_i^{j+1-m} - \delta_i^{j-m}}{\lambda} + O(t) \right) \right\} \varpi_{j,m}, \quad (18)$$

$$\text{where } \varpi_{j,m} = \text{erf} \left\{ \frac{\alpha j}{1-\alpha} (m-j) \right\} - \text{erf} \left\{ \frac{\alpha j}{1-\alpha} (m-j+1) \right\}$$

Discretization through Crank-Nicolson method for second and fourth order derivative w.r.t space variable is given as follow:

$$\frac{\partial^2 \delta(\zeta, t)}{\partial \zeta^2} = \frac{1}{2h^2} \left\{ (\delta_{i+1}^{j+1} - 2\delta_i^{j+1} + \delta_{i-1}^{j+1}) + (\delta_{i+1}^j - 2\delta_i^j + \delta_{i-1}^j) \right\} + O(t), \quad (19)$$

$$\frac{\partial^4 \delta(\zeta, t)}{\partial \zeta^4} = \frac{1}{2h^4} \left\{ \begin{aligned} & (\delta_{i+2}^{j+1} - 4\delta_{i+1}^{j+1} + 6\delta_i^{j+1} - 4\delta_{i-1}^{j+1} + \delta_{i-2}^{j+1}) \\ & + (\delta_{i+2}^j - 4\delta_{i+1}^j + 6\delta_i^j - 4\delta_{i-1}^j + \delta_{i-2}^j) \end{aligned} \right\} + O(t), \quad (20)$$

With the above discretization given in equations. (19)-(20), the generalized governing Eqs. will take the shape:

$$\frac{\Pi(\alpha)}{2\alpha} \left\{ \frac{u_i^{j+1} - u_i^j}{\lambda} + \sum_{j=1}^m \left(\frac{u_i^{j+1-m} - u_i^{j-m}}{\lambda} \right) \right\} \varpi_{j,m} = \beta t^{\beta-1} \left\{ \begin{aligned} & G - \mathfrak{R} \left[\frac{1}{2h^2} \left(\begin{aligned} & (u_{i+1}^{j+1} - 2u_i^{j+1} + u_{i-1}^{j+1}) \\ & + (u_{i+1}^j - 2u_i^j + u_{i-1}^j) \end{aligned} \right) \right] \\ & \eta \frac{1}{2h^4} \left(\begin{aligned} & (u_{i+2}^{j+1} - 4u_{i+1}^{j+1} + 6u_i^{j+1} - 4u_{i-1}^{j+1} + u_{i-2}^{j+1}) \\ & - (u_{i+2}^j - 4u_{i+1}^j + 6u_i^j - 4u_{i-1}^j + u_{i-2}^j) \end{aligned} \right) \\ & + \frac{1}{2} (Gr(\Theta_i^{j+1} + \Theta_i^j) + Gm(\Phi_i^{j+1} + \Phi_i^j)) \end{aligned} \right\}, \quad (21)$$

$$\frac{\Pi(\alpha)}{2\alpha} \left\{ \frac{\Theta_i^{j+1} - \Theta_i^j}{\lambda} + \sum_{j=1}^m \left(\frac{\Theta_i^{j+1-m} - \Theta_i^{j-m}}{\lambda} \right) \right\} \varpi_{j,m} = \beta t^{\beta-1} \left\{ \frac{1}{h_2} \left\{ \frac{1}{2h^2} \left((\Theta_{i+1}^{j+1} - 2\Theta_i^{j+1} + \Theta_{i-1}^{j+1}) \right) \right\} + \psi \left(\frac{1}{4h} \left((\Theta_{i+1}^j + \Theta_{i-1}^j) \right) \right)^2 \right\}, \quad (22)$$

$$\frac{\Pi(\alpha)}{2\alpha} \left\{ \frac{\Phi_i^{j+1} - \Phi_i^j}{\lambda} + \sum_{j=1}^m \left(\frac{\Phi_i^{j+1-m} - \Phi_i^{j-m}}{\lambda} \right) \right\} \varpi_{j,m} = \beta t^{\beta-1} \left\{ \Im \frac{1}{2h^2} \left((\Phi_{i+1}^{j+1} - 2\Phi_i^{j+1} + \Phi_{i-1}^{j+1}) \right) \right\}, \quad (23)$$

2 Consider that $y_i = ih$, $0 \leq i \leq M$ with $Mh = 1$ and $\tau_j = j\lambda$, $0 \leq n \leq N$.

Nomenclature

Symbol	Name	Symbol	Name
μ	Dynamic Viscosity	ρC_p	Specific Heat Capacity
β_T	Thermal Expansion Coefficient	β_c	Concentration
D	Mass Diffusion Rate	k	Thermal Conductivity
\vec{j}	Current Density	\vec{B}	Induced Magnetic Field
G	External Pressure Gradient	η	Couple Stress Parameter
Gm	Mass Grashof Number	Gr	Thermal Grashof Number
Ec	Eckert Number	Pr	Prandtl Number
Re	Reynold Number	Sc	Schmidth Number
α	Fractional Order	β	Fractal Dimension
h	Space Length	λ	Time Length
IBCs	Initial and Boundary Conditions	M, N	Number of Grid Points

3. Nusselt and Sherwood Number

The Nusselt and Sherwood numbers are expressed in unitless form as follows (Ali et al., 2020a):

$$Nu = -\frac{k_{nf}}{k_{TO}} \frac{\partial \Theta}{\partial \zeta} \Big|_{\zeta=0} \quad (24)$$

$$S_h = -D_{nf} \left(\frac{\partial \Phi}{\partial \zeta} \right) \Big|_{\zeta=0} \quad (25)$$

4. Results and Discussion

Non-linear couple stress nanofluid model has been evaluated in a microchannel. The ordinary mathematical model has been converted into a fractal-fractional model by using the operator of CF and fractal dimension. The non-dimensional form of the generalized governing equations has been discretized. The numerical solution has been obtained through the Crank-Nicolson technique. Graphs for the embedded parameters have been drawn to provide an insight into the phenomenon.

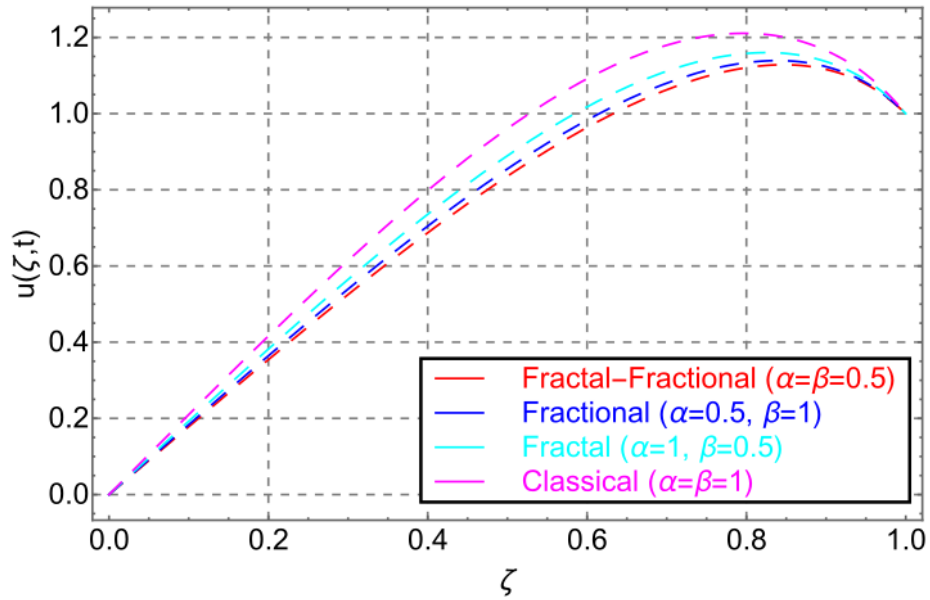


Figure 2. Velocity fields of classical, fractals, fractions, and fractals-fractional order models

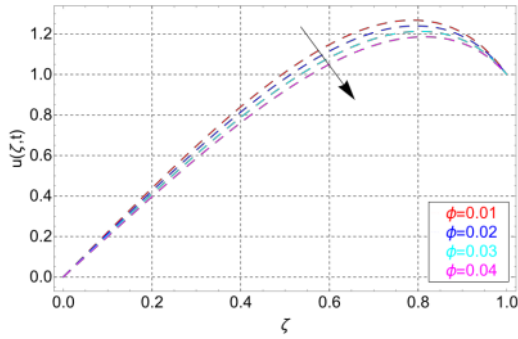


Fig. 3 (a): Velocity field in response to ϕ .

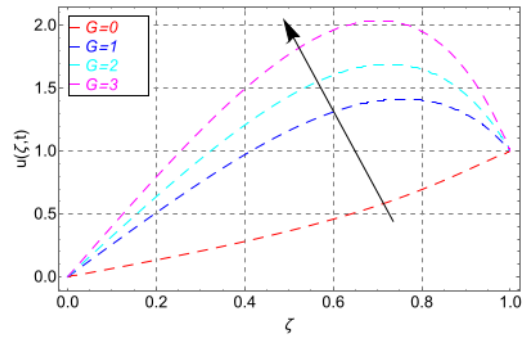


Fig. 3 (b): Velocity field in response to G .

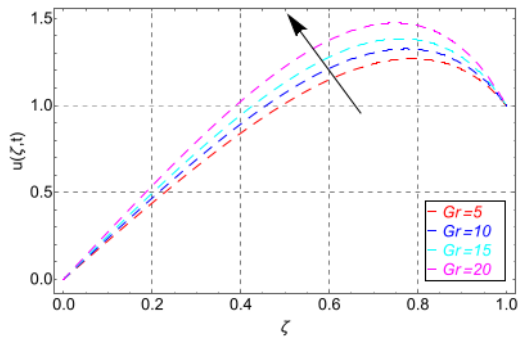


Fig. 4(a): Velocity field in response to Gr .

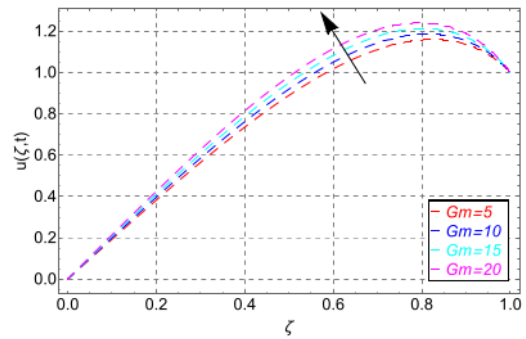


Fig. 4(b): Velocity field in response to Gm .

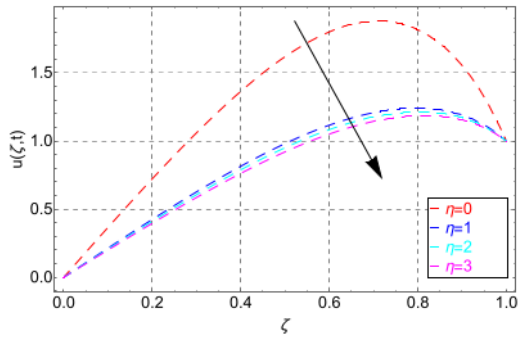


Fig. 5 (a): Velocity field in response to η .

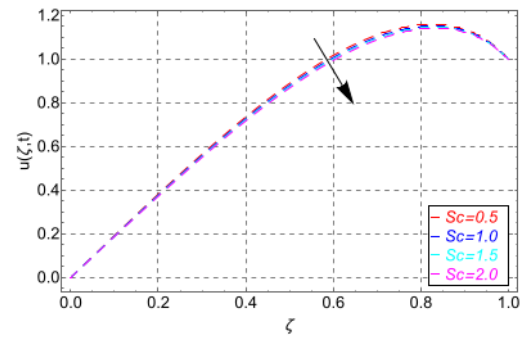


Fig. 5 (b): Velocity field in response to Sc .

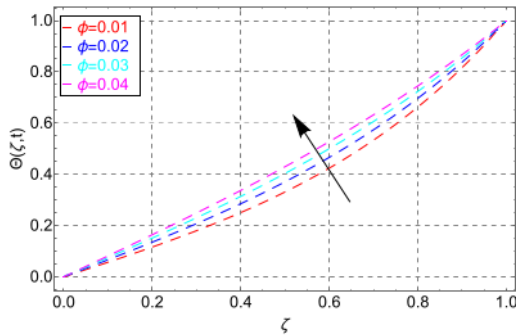


Fig 6(a): Temperature field in response to ϕ .

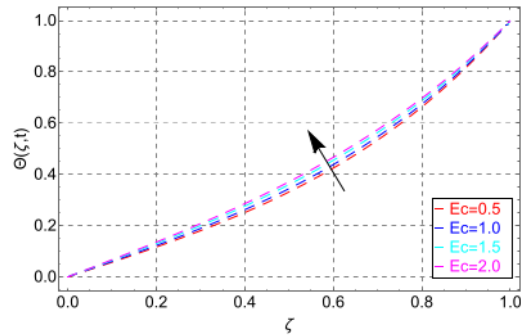


Fig 6 (b): Temperature field in response to Ec .

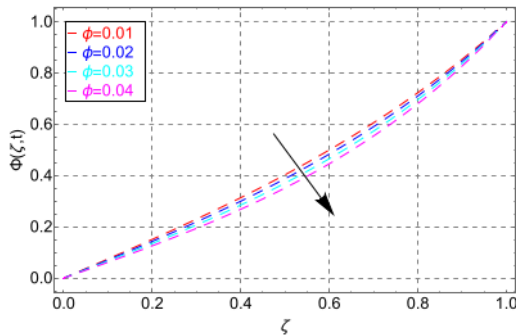


Fig. 7(a): Concentration field in response to ϕ .

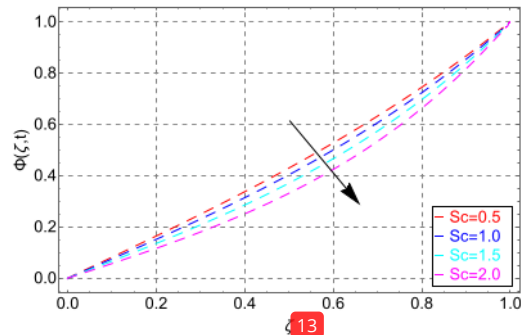


Fig. 7(b): Concentration field in response to Sc .

To see the comparative features of fractal-fractional, fractal, fractional and classical order models, Fig. 2. has been plotted from the obtained numerical solution. From the figure, it can be seen that one can easily sketch the graph for fractal dimension, fractional and classical order from the fractal-fractional solution by adjusting their generalized parameters. There is a stronger memory effect observed in fractal-fractional order operators as a result of the additional fractal dimensions involved, as compared to simple fractional and classical order operators. There is a stronger memory effect associated with fractal-fractional models, making them more realistic and practical. Additionally, experimentalists are able to compare the results of their work in more than one fluid layer by simply adjusting the fractal-fractional parameter.

A dispersion of nanoparticles within a fluid is depicted in Fig 3(a) by showing the resulting change in velocity field caused by their dispersal. The addition of nanoparticles to a fluid can

decrease the velocity profile due to increased viscosity, which leads to increased resistance to flow. This increased resistance can result in a decreased velocity of the fluid as it moves through a channel or pipe, causing the velocity profile to flatten. So as the cadmium telluride concentration increases, the viscous layer becomes stronger, reducing fluid mobility within the microchannel. Additionally, the size and concentration of nanoparticles in the fluid can also play a role in the extent to which they affect the velocity profile. This finding suggests that using cadmium telluride particles in transformer oil can improve its lubricating properties significantly. The upshots of external pressure G^* on the motion of the fluid have been drawn in Fig 3(b). Fig.3(b) shows acceleration in the fluid motion for higher magnitude of G^* . As the value of G^* increases the normal stresses on the fluid surface increase and due to this effect the fluid motion accelerates.

To analyze the behavior of fluid in response to Gr , Fig.4(a) has been plotted. In the figure, we can clearly see that an increasing value of Gr accelerates fluid motion. It is due to buoyancy forces that occur in the fluid due to the higher temperature, and therefore the fluid is accelerated due to the buoyancy forces. Figure 4(b) illustrates that similar results are observed for larger values of the mass Grashof number Gm . This tendency can be explained by the fact that increasing the magnitude of Gm causes the concentration level in the fluid to rise. This causes the fluid to move faster as a result.

It can be seen in Fig 5(a) how the couple stress parameter η affects the distribution of velocity as a result of the couple stress parameter. When the couple stress parameter is increased, the nanofluid's velocity drops. Because of the nanoparticles dispersed in transformer oil, this variation occurs. Certain additives scatter in a fluid by opposing the forces they create. As fluids move, a couple of forces and stresses are created as a result of opposing forces. Due to these opposing forces, fluid motion is slows down. In order to see the behavior of velocity field of the base fluid against Schmidt number Sc , Fig.5 (b) has been portrayed through Mathematica. From sketch decreasing pattern of the velocity profile can be noticed for larger values of Sc . It is because of a rise in the viscous forces of fluid that this trend in the velocity profile exists.

Fig.6 (a) illustrates the changes in the thermal energy distribution caused by cadmium telluride concentration in transformer oil based on changes in the volume fraction of the metal. The temperature profile of transformer oil is influenced by many factors, including the material

properties of the insulation, the load on the transformer, and the ambient temperature. The presence of cadmium telluride nanoparticles in the transformer oil may potentially increase the temperature profile, but the effect would depend on the specifics of the system. In general, nanoparticles can enhance heat transfer in a fluid by increasing the convective heat transfer due to their high surface area to volume ratio. If the cadmium telluride nanoparticles are dispersed in the transformer oil, they may increase the overall heat transfer rate in the fluid, leading to an increase in the temperature profile. It is important to note that the effect of nanoparticles on the temperature profile would also depend on the size and concentration of the particles, as well as the viscosity of the oil and other system parameters. Further research would be needed to determine the specific impact of cadmium telluride nanoparticles on the temperature profile of transformer oil. Fig. 6 (b) shows how the Eckert number affects the transfer of heat. When the Eckert number is increased, the temperature profile tends to rise with an increasing magnitude, as shown in the graph. Eckert numbers are dimensionless numbers that describe the transfer of heat from one fluid to another in fluid mechanics. It is defined as the ratio of convective heat transfer to conductive heat transfer. A higher Eckert number indicates an increase in convective heat transfer compared to conductive heat transfer, which results in a higher temperature profile of the fluid. The reason behind this is that convective heat transfer increases the rate of heat transfer throughout the fluid, which can lead to a more uniform temperature distribution throughout the fluid.

Variation in concentration in response to volume fraction of nanoparticle are portrayed in Fig 7(a). Cadmium telluride nanoparticles increase the concentration profile of transformer oil when they are introduced into the fluid, but the effect would depend on various factors such as the size and distribution of the nanoparticles, the viscosity of the oil, and the conditions in the transformer. In general, nanoparticles can increase the concentration profile of a fluid if they are not evenly dispersed and tend to concentrate in certain regions of the fluid due to differences in fluid flow, buoyancy, or other factors. This can lead to variations in the properties of the fluid and potentially impact the performance of the transformer. It is important to note that while nanoparticles can potentially increase the concentration profile of transformer oil, they may also have other effects on the properties and performance of the oil, and these would need to be carefully evaluated. The impact of nanoparticles on the concentration profile would likely depend on the specifics of the system and would require further research to determine. The upshots of Sc

on concentration profile are plotted in Fig 7 (b). The figure shows decreasing trend in its profile in response to the higher values of Sc . This change in the profile is due to the inverse relationship of mass diffusion rate and Sc . So as the value of Sc gets up the diffusion rate gets slow and as a result the profile of concentration slow decreasing trend.

Table 2 shows the response to dispersion of nano particles in mineral transformer oil in terms of heat and mass transfer. Interestingly, Sherwood's and Nusselt's numbers have shown opposite trends in terms of variation. In MTO, when the volume fraction reaches 0.04, the heat transfer rate has increased, but the mass transfer rate has decreased. As a result the rate of heat transfer is increased by 15.27%. the mass transfer rate decreased by 2.07%.

Table.1: Cadmium Telluride Nanoparticles and Transformer Oil: Thermomechanical Characteristic (Ghaffarkhah et al., 2020; Murtaza et al., 2022b)

	$\rho (kg / m^3)$	$C_p (J / kgK)$	$K (W / mK)$	$\beta_T \times 10^{-5} (K^{-1})$	$\sigma (Sm^{-1})$
Cadmium Telluride	5855	209	7.5	0.00005	0.0000007
Transformer Oil	861	1860	0.157	0.75	1.57×10^{-8}

Table 2: Nusselt and Sherwood number for MTO based-Cadmium Telluride

ϕ	Nu	Heat Transfer Enhancement	S_h	Decrease in Mass Distribution
0	2.763	--	3.287	--
1%	2.895	3.47%	3.268	0.58%
2%	2.982	7.93%	3.252	1.06%
3%	3.086	11.69%	3.237	1.52%
4%	3.185	15.27%	3.219	2.07%

5. Concluding Remarks

We have investigated the non-linear fractal-fractional model of couple stress nanofluid using a numerical approach, which is based on fractal-fractional theory. Viscose dissipation was considered during the investigation. Firstly, the classical model has been formulated with help of

constitutive equations and then generalized via the operator of fractal-fractional derivative. After generalization the model has been non-dimensionalized with the help of non-dimensional entities. The numerical solution to the non-dimensional model has been obtained via Crank-Nicolson scheme. For graphical study the computational software mathematica has been used. The key points from the present analysis are addressed below:

- It is observed that for larger of Gr , Gm and G , velocity increases while retards with small values of ϕ , Sc and η .
- The thermal boundary layer shows an increasing behavior against ϕ , Ec and t .
- Concentration field upsursges against Sc and ϕ .
- Increasing cadmium telluride nanoparticle volume fraction to 0.04 significantly increases heat transfer rate of the system, which reaches a significant increase of 15.27% after adding 4% cadmium telluride nanoparticles.
- The mass transfer rate increases significantly up to 2.07% when the fraction of cadmium telluride nanoparticles reaches 0.04, indicating that it improves the process of mass transfer when the amount of nanoparticles reaches 0.04.

REFERENCES

- Abro, K.A., Atangana, A., 2020. A comparative study of convective fluid motion in rotating cavity via Atangana–Baleanu and Caputo–Fabrizio fractal–fractional differentiations. *Eur. Phys. J. Plus* 2020 1352 135, 1–16. <https://doi.org/10.1140/EPJP/S13360-020-00136-X>
- Ahmad, Z., Ali, F., Khan, N., Khan, I., 2021. Dynamics of fractal-fractional model of a new chaotic system of integrated circuit with Mittag-Leffler kernel. *Chaos, Solitons & Fractals* 153, 111602. <https://doi.org/10.1016/J.CHAOS.2021.111602>
- Akhtar, S., Shah, N.A., 2018. Exact solutions for some unsteady flows of a couple stress fluid between parallel plates. *Ain Shams Eng. J.* 9, 985–992. <https://doi.org/10.1016/J.ASEJ.2016.05.008>

- Ali, F., Ahmad, Z., Arif, M., Khan, I., Nisar, K.S., 2020a. A Time Fractional Model of Generalized Couette Flow of Couple Stress Nanofluid with Heat and Mass Transfer: Applications in Engine Oil. *IEEE Access* 8, 146944–146966.
<https://doi.org/10.1109/ACCESS.2020.3013701>
- Ali, F., Ahmad, Z., Arif, M., Khan, I., Nisar, K.S., 2020b. A Time Fractional Model of Generalized Couette Flow of Couple Stress Nanofluid with Heat and Mass Transfer: Applications in Engine Oil. *IEEE Access* 8, 146944–146966.
<https://doi.org/10.1109/ACCESS.2020.3013701>
- Almalahi, M.A., Abdo, M.S., Panchal, S.K., 2021a. Existence and Ulam–Hyers stability results of a coupled system of ψ -Hilfer sequential fractional differential equations. *Results Appl. Math.* 10, 100142. <https://doi.org/10.1016/J.RINAM.2021.100142>
- Almalahi, M.A., Panchal, S.K., Jarad, F., 2021b. Stability results of positive solutions for a system of ψ -Hilfer fractional differential equations. *Chaos, Solitons & Fractals* 147, 110931. <https://doi.org/10.1016/J.CHAOS.2021.110931>
- Almalahi, M.A., Panchal, S.K., Jarad, F., Abdeljawad, T., 2021c. Ulam–Hyers–Mittag-Leffler stability for tripled system of weighted fractional operator with TIME delay. *Adv. Differ. Equations* 2021, 1–18. <https://doi.org/10.1186/S13662-021-03455-0/METRICS>
- Arif, M., Ali, F., Sheikh, N.A., Khan, I., 2019. Enhanced heat transfer in working fluids using nanoparticles with ramped wall temperature: Applications in engine oil. *Res. Artic. Adv. Mech. Eng.* 11, 1–11. <https://doi.org/10.1177/1687814019880987>
- Atangana, A., 2017. Fractal-fractional differentiation and integration: Connecting fractal calculus and fractional calculus to predict complex system. *Chaos, Solitons & Fractals* 102, 396–406. <https://doi.org/10.1016/J.CHAOS.2017.04.027>
- Atangana, A., İğret Araz, S., 2020. New numerical approximation for Chua attractor with fractional and fractal-fractional operators. *Alexandria Eng. J.* 59, 3275–3296.
<https://doi.org/10.1016/J.AEJ.2020.01.004>
- Atangana, A., Qureshi, S., 2019. Modeling attractors of chaotic dynamical systems with fractal–fractional operators. *Chaos, Solitons & Fractals* 123, 320–337.

<https://doi.org/10.1016/J.CHAOS.2019.04.020>

- Biomechanics, L.S.-J. of, 1985, undefined, n.d. Flow of couple stress fluid through stenotic blood vessels. Elsevier.
- Choi, S., Eastman, J., 1995. Enhancing thermal conductivity of fluids with nanoparticles.
- Ellahi, R., Zeeshan, A., Hussain, F., Symmetry, A.A.-, 2019, undefined, n.d. Peristaltic blood flow of couple stress fluid suspended with nanoparticles under the influence of chemical reaction and activation energy. mdpi.com.
- Ghaffarkhah, A., Afrand, M., Talebkeikhah, M., Sehat, A.A., Moraveji, M.K., Talebkeikhah, F., Arjmand, M., 2020. On evaluation of thermophysical properties of transformer oil-based nanofluids: A comprehensive modeling and experimental study. *J. Mol. Liq.* 300, 112249. <https://doi.org/10.1016/J.MOLLIQ.2019.112249>
- Hasin, F., Ahmad, Z., Ali, F., Khan, N., Khan, I., 2022. A time fractional model of Brinkman-type nanofluid with ramped wall temperature and concentration. *Adv. Mech. Eng.* 14, 168781322210960. <https://doi.org/10.1177/16878132221096012>
- Heydari, M.H., 2020. Numerical solution of nonlinear 2D optimal control problems generated by Atangana-Riemann-Liouville fractal-fractional derivative. *Appl. Numer. Math.* 150, 507–518. <https://doi.org/10.1016/J.APNUM.2019.10.020>
- Hussain, F., Ellahi, R., Zeeshan, A., Liquids, K.V.-J. of M., 2018, undefined, n.d. Modelling study on heated couple stress fluid peristaltically conveying gold nanoparticles through coaxial tubes: a remedy for gland tumors and arthritis. Elsevier.
- International, J.L.-T., 1998, undefined, n.d. Squeeze film characteristics of finite journal bearings: couple stress fluid model. Elsevier.
- Khan, M.I., Puneeth, V., 2021. Isothermal autocatalysis of homogeneous–heterogeneous chemical reaction in the nanofluid flowing in a diverging channel in the presence of bioconvection. <https://doi.org/10.1080/17455030.2021.2008547>. <https://doi.org/10.1080/17455030.2021.2008547>
- L., H.R., 1962. Thermal Conductivity of Heterogeneous Two-Component Systems. I&EC

Fundam. 1, 182–187.

Masuda, H., Ebata, A., Teramae, K., 1993. Alteration of thermal conductivity and viscosity of liquid by dispersing ultra-fine particles. Dispersion of Al₂O₃, SiO₂ and TiO₂ ultra-fine particles.

Maxwell James C., 1873. A Treatise on Electricity and Magnetism. (No Title) 116, 702–709.
<https://doi.org/10.1541/IEEEJIAS.116.702>

Murtaza, S., Iftekhar, M., Ali, F., Aamina, Khan, I., 2020. Exact Analysis of Non-Linear Electro-Osmotic Flow of Generalized Maxwell Nanofluid: Applications in Concrete Based Nano-Materials. IEEE Access 8, 96738–96747. <https://doi.org/10.1109/ACCESS.2020.2988259>

Murtaza, S., Kumam, P., Ahmad, Z., Sittithakerngkiet, K., Ali, I. e., 2022a. Finite Difference Simulation of Fractal-Fractional Model of Electro-Osmotic Flow of Casson Fluid in a Micro Channel. IEEE Access 1–1. <https://doi.org/10.1109/ACCESS.2022.3148970>

Murtaza, S., Kumam, P., Kaewkhao, A., Khan, N., Ahmad, Z., 2022b. Fractal fractional analysis of non linear electro osmotic flow with cadmium telluride nanoparticles. Sci. Reports 2022 121 12, 1–16. <https://doi.org/10.1038/s41598-022-23182-0>

Naduvnamani, N.B., Kashinath, B., 2006. Surface roughness effects on curved pivoted slider bearings with couple stress fluid. Lubr. Sci. 18, 293–307. <https://doi.org/10.1002/lis.24>

Pralhad, R.N., Schultz, D.H., 2004. Modeling of arterial stenosis and its applications to blood diseases. Math. Biosci. 190, 203–220. <https://doi.org/10.1016/J.MBS.2004.01.009>

Ramesh, K., Engineering, M.D.-N., 2019, undefined, n.d. Effect of endoscope on the peristaltic transport of a couple stress fluid with heat transfer: Application to biomedicine. degruyter.com.

Rasheed, H.U., Islam, S., Helmi, M.M., Alsallami, S.A.M., Khan, Z., Khan, I., 2021. An Analytical Study of Internal Heating and Chemical Reaction Effects on MHD Flow of Nanofluid with Convective Conditions. Cryst. 2021, Vol. 11, Page 1523 11, 1523.
<https://doi.org/10.3390/CRYST11121523>

Shahzad, F., Baleanu, D., Jamshed, W., Nisar, K.S., Eid, M.R., Safdar, R., Ismail, K.A., 2021.

Flow and heat transport phenomenon for dynamics of Jeffrey nanofluid past stretchable sheet subject to Lorentz force and dissipation effects. *Sci. Reports* 2021 11: 1–15. <https://doi.org/10.1038/s41598-021-02212-3>

Shit, G., Liquids, N.R.-J. of M., 2016, undefined, n.d. Role of slip velocity on peristaltic transport of couple stress fluid through an asymmetric non-uniform channel: Application to digestive system. Elsevier.

Stokes, V.K., Stokes, V.K., 1984. Couple Stresses in Fluids, in: *Theories of Fluids with Microstructure*. Springer Berlin Heidelberg, pp. 34–80. https://doi.org/10.1007/978-3-642-82351-0_4

Tripathi, D., 2011. Peristaltic flow of couple-stress conducting fluids through a porous channel: Applications to blood flow in the micro-circulatory system. *J. Biol. Syst.* 19, 461–477. <https://doi.org/10.1142/S021833901100407X>

paper

ORIGINALITY REPORT

18%

SIMILARITY INDEX

12%

INTERNET SOURCES

14%

PUBLICATIONS

4%

STUDENT PAPERS

PRIMARY SOURCES

1	www.ncbi.nlm.nih.gov Internet Source	3%
2	www.nature.com Internet Source	2%
3	Submitted to Higher Education Commission Pakistan Student Paper	2%
4	www.researchgate.net Internet Source	1%
5	Submitted to American University in the Emirates Student Paper	1%
6	www.mdpi.com Internet Source	1%
7	Farhad Ali, Zubair Ahmad, Muhammad Arif, Ilyas Khan, Kottakkaran Sooppy Nisar. "A Time Fractional Model of Generalized Couette Flow of Couple Stress Nanofluid With Heat and Mass Transfer: Applications in Engine Oil", IEEE Access, 2020	1%

8

Saqib Murtaza, Poom Kumam, Zubair Ahmad, Kanokwan Sitthithakerngkiet, Ibn E Ali. "Finite Difference Simulation of Fractal-Fractional Model of Electro-Osmotic Flow of Casson Fluid in a Micro Channel", IEEE Access, 2022

Publication

<1 %

9

Hussam Alrabaiah, Muhammad Bilal, Muhammad Altaf Khan, Taseer Muhammad, Endris Yimer Legas. "Time fractional model of electro-osmotic Brinkman-type nanofluid with heat generation and chemical reaction effects: application in cleansing of contaminated water", Scientific Reports, 2021

Publication

<1 %

10

[mdpi-res.com](https://www.mdpi-res.com)
Internet Source

<1 %

11

Fuzang Wang, Abdulkafi. M. Saeed, V. Puneeth, Nehad A. Shah, M. Shoaib Anwar, Kamel Geudri, Sayed M. Eldin. " Heat and mass transfer of nano-thin film flowing over a porous medium: A modified Buongiorno's model ", Chinese Journal of Physics, 2023

Publication

<1 %

12

Submitted to Heriot-Watt University
Student Paper

<1 %

13

Saqib Murtaza, Poom Kumam, Zubair Ahmad, Kanokwan Sittithakerngkiet, Ibn e Ali. "Finite Difference Simulation of Fractal-Fractional Model of Electro-Osmotic Flow of Casson Fluid in a Micro Channel", IEEE Access, 2022

Publication

<1 %

14

ir.lib.uth.gr

Internet Source

<1 %

15

Jinde Cao. "A set of stability criteria for delayed cellular neural networks", IEEE Transactions on Circuits and Systems I: Fundamental Theory and Applications, 2001

Publication

<1 %

16

Kishore Bingi, Rosdiazli Ibrahim, Mohd Noh Karsiti, Sabo Miya Hassan, Vivekananda Rajah Harindran. "Fractional-order Systems and PID Controllers", Springer Science and Business Media LLC, 2020

Publication

<1 %

17

Muhammad Arif, Poom Kumam, Wiyada Kumam, Ali Akgul, Thana Sutthibutpong. "Analysis of newly developed fractal-fractional derivative with power law kernel for MHD couple stress fluid in channel embedded in a porous medium", Scientific Reports, 2021

Publication

<1 %

18

Muhammad Jawad, Salah Boulaaras, Niaz Ali Shah, Rashid Jan, Sulima Ahmed Zubair.

"Analytic Simulation for Magnetohydrodynamic Unsteady Buongiorno Model Hybrid Nanofluid Flow over Stretching", *Advances in Mathematical Physics*, 2022

Publication

<1 %

19

Submitted to University of Pretoria

Student Paper

<1 %

20

Zubair Ahmad, Sherif A. El-Kafrawy, Thamir A. Alandijany, Francesco Giannino et al. "A Global Report on the Dynamics of COVID-19 with Quarantine and Hospitalization: A Fractional Order Model with Non-Local Kernel", *Computational Biology and Chemistry*, 2022

Publication

<1 %

21

1library.net

Internet Source

<1 %

22

D. S. Bhandari, Dharmendra Tripathi, V. K. Narla. "Pumping flow model for couple stress fluids with a propagative membrane contraction", *International Journal of Mechanical Sciences*, 2020

Publication

<1 %

23

Zubair Ahmad, Farhad Ali, Naveed Khan, Ilyas Khan. "Dynamics of fractal-fractional model of a new chaotic system of integrated circuit with Mittag-Leffler kernel", Chaos, Solitons & Fractals, 2021

Publication

<1 %

24

link.springer.com

Internet Source

<1 %

25

www.scilit.net

Internet Source

<1 %

26

Mostafa Keshavarz Moraveji, Ahmadreza Ghaffarkhah, Farough Agin, Mohsen Talebkeikhah et al. "Application of amorphous silica nanoparticles in improving the rheological properties, filtration and shale stability of glycol-based drilling fluids", International Communications in Heat and Mass Transfer, 2020

Publication

<1 %

27

Naveed Khan, Farhad Ali, Muhammad Arif, Zubair Ahmad, Aamina Aamina, Ilyas Khan. "Maxwell Nanofluid Flow over an Infinite Vertical Plate with Ramped and Isothermal Wall Temperature and Concentration", Mathematical Problems in Engineering, 2021

Publication

<1 %

28

msp.org

Internet Source

<1 %

29

A. Siddangouda, T. V. Biradar, N. B. Naduvinamani. "Combined effects of micropolarity and surface roughness on the hydrodynamic lubrication of slider bearings", Journal of the Brazilian Society of Mechanical Sciences and Engineering, 2013

Publication

<1 %

30

Afifa Riahi, Saleh Khamlich, Moncef Balghouthi, Touria Khamliche et al. "Study of thermal conductivity of synthesized Al₂O₃-water nanofluid by pulsed laser ablation in liquid", Journal of Molecular Liquids, 2020

Publication

<1 %

31

Dolat Khan, Subhan Ullah, Poom Kumam, Wiboonsak Watthayu, Zafar Ullah, Ahmed M. Galal. "A generalized dusty Brinkman type fluid of MHD free convection two phase flow between parallel plates", Physics Letters A, 2022

Publication

<1 %

32

SAQIB MURTAZA, POOM KUMAM, ZUBAIR AHMAD, THIDAPORN SEANGWATTANA, IBN E ALI. "NUMERICAL ANALYSIS OF NEWLY DEVELOPED FRACTAL-FRACTIONAL MODEL OF CASSON FLUID WITH EXPONENTIAL MEMORY", Fractals, 2022

<1 %

33

Wen, D.. "Formulation of nanofluids for natural convective heat transfer applications", International Journal of Heat and Fluid Flow, 200512

Publication

<1 %

34

acikbilim.yok.gov.tr

Internet Source

<1 %

35

am.math.cas.cz

Internet Source

<1 %

36

digital.library.unt.edu

Internet Source

<1 %

37

dokumen.pub

Internet Source

<1 %

38

ijrei.com

Internet Source

<1 %

39

prof.mkostic.com

Internet Source

<1 %

40

studentsrepo.um.edu.my

Internet Source

<1 %

41

www.coursehero.com

Internet Source

<1 %

42

www.degruyter.com

Internet Source

<1 %

43 Shafiq Ahmad, Sami Ul Haq, Farhad Ali, Ilyas Khan, Kottakkaran Sooppy Nisar. "Time fractional analysis of channel flow of couple stress Casson fluid using Fick's and Fourier's Laws", Scientific Reports, 2022 <1 %
Publication

44 Jaw-Ren Lin. "Squeeze film characteristics of finite journal bearings: couple stress fluid model", Tribology International, 1998 <1 %
Publication

45 Zenon Matuszak. "Fractional Bloch's Equations Approach to Magnetic Relaxation", Current Topics in Biophysics, 2015 <1 %
Publication

Exclude quotes Off

Exclude matches Off

Exclude bibliography On