GEOREF

by ΚΩΝΣΤΑΝΤΙΝΟΣ ΚΑΠΠΑΣ

Submission date: 05-Aug-2024 09:43AM (UTC+0300)

Submission ID: 2426183630


File name: Georeference_of_Exposure.docx (15.16M)

Word count: 4686

Character count: 27309

Article

Georeferencing of Exposure from EMF Base Stations in Urban Areas



Submitted for possible open access publication under the terms and conditions of the Creative Commons Attribution (CC BY) license

(https://creativecommons.org/license s/by/4.0/).

Abstract:

- (1) Background: In modern society, the use of sources that emits electromagnetic radiation (EMR) such as television, radio, mobile telephony, etc. constantly increases, resulting in a parallel increase in the stress of the general population, about the effects that may be caused to health. For this reason, EMR measurements and their evaluations should be communicated to the population to reduce misinformation and undue stress. The purpose of this work is to is to Georeferencing of Exposure to 4G and 5G Radiofrequency Electromagnetic Fields from mobile phones in Thessaly Region (Central Greece).
- (2) Methods: 220 measurements were performed in the region of Thessaly, in order to compare the electromagnetic exposure before and after 5G installation. A portable field strength analyzer (SRM 3006, Narda Safety Test Solutions, Pfullingen, Germany) and a three-axis isotropic antenna were used, and 4G and 5G electromagnetic radiation measurements were performed in 3 cities of Central Greece, in the region of Thessaly. We used GIS, especially Kriging algorithm to create electromagnetic environment maps.
- (3) Results: Before the installation of 5G, measurements conducted in the Thessaly region, in all cities (Larisa, Karditsa, Volos) showed an mean exposure ratio of 0.0003, with a median value of 0.0001. After the installation of 5G, measurements showed an mean and median exposure ratio of 0.0008.
- (4) Conclusions: The recorded exposure 30 uses within the Thessaly region consistently remained below the internationally recommended benchmark levels established by the ICNIRP. Consequently, there is no significant risk of electromagnetic radiation from mobile phones and base stations in sensitive lands (schools, kindergarten etc) located in the cities of Thessaly.

Keywords: electromagnetic radiation; 4G; 5G; GIS; public exposure

1. Introduction

The manner in which electromagnetic radiation interacts with matter is contingent upon its frequency, and various terms are employed to describe radiation based on its distinct physical characteristics. The electromagnetic spectrum spans the frequency range from low-frequency radio waves (radio, TV, communications) to high-frequency gamma waves (PET scan, diagnosis and therapy). [10]

Technological advancements have led to an exponential expansion in the field of telecommunications. In recent decades, telecommunications have undergone a dramatic change in the nature of the system, speed, technology, and frequency. For example, mobile wireless networks started with the first analog generation of mobile telephony (1G), which was developed in the early 1980s with limited features (analog voice) and continues to be developed in the newer generations 5G and 6G, which support almost instant communication and big data transfer without compromising on network efficiency. [16]

Given these technological developments, the presence of radio frequencies (RF) from wireless networks and other technologies has become ubiquitous. RF transmitters have become commonplace in mes, offices, and schools. [1, 13] In terms of mobile corps unication, in 2020 the number of mobile users worldwide amounts to 6.95 billion and

is estimated to reach 7.49 billion by 2025, a number that represents approximately 91% of the world's population. [27] Due to high demand, a huge number of communication networks interconnect societies around the world, and mobile wireless technology networks are growing significantly, especially after the development of 5G.

Numerous studies [7, 14, 15, 24, 25, 28] have investigated whether there is a correlation between exposure to radiation from mobile phones and the occurrence of certain types of cancer or other diseases. Most of these studies have not find evidence of a correlation. Some studies have suggested a potential link between the use of mobile phones and brain cancer, but broader scientific assessments have not reached a unanimous conclusion. The general population is not sufficiently familiar with the concepts of electromagnetic radiation and combined with a lack of information, public fears about the effects of radiation on humans remain instified.

International organizations such as International Commission on Non-Ionizing Protection (ICNIRP) have established standards [11] with the aim of protecting both the general population and professionals from electromagnetic radiation and the effects it can cause on health. These recommendations are adopted by the European Union and then it is up to each quintry whether to accept them exactly as they are or to modify them. In Greece, the safety limits for the general population are 30% lower compared to the corresponding EU limits. For sensitive areas such as schools, hospitals, and nursing homes located within 300 meters of an antenna station, the limits are reduced by 40% compared to the EU andards.

The aim of this paper is to:

- present the measurements and evaluations of electromagnetic radiation exposure to the population from 4G and 5G.
- depict the results graphically applying Geographic Information Systems (GIS) methods, to evaluate the EM burden from all present EM sources by areas and not only by specific points.

GIS play a pivotal role in the production of electromagnetic exposure maps, offering a powerful tool for visualizing and analyzing the distribution of electromagnetic fields in our environment. GIS technology enables researchers [2, 3, 8, 18, 20, 21] and professionals to collect, manage, and analyze spatial data related to electromagnetic emissions from various sources, such as base stations. By integrating datasets from multiple source 21 GIS helps create accurate and informative exposure maps that assist in assessing potential health risks and making informed decisions regarding electromagnetic radiation levels in specific areas. This capability of GIS contributes significantly to our understanding and management of electromagnetic exposure, ensuring the safety of general population and especially children. [17, 22, 23].

2. Materials and Methods

2.1 Calculation of electromagnetic field levels – Measurement system A portable field strength analyger (SRM 3006, Narda Safety Test Solutions, Pfullingen, Germany) and a three-axis isotropic antenna covering frequencies from 27 MHz to 6 GHz were used for environmental electromagnetic radiation measurements. The values dispiyed by the SRM-3006 during the measurement express the total electric field

strength measured in V/m but also the contribution of all the individual RF sources.

The frequency selective measurements were performed according to the standard proporty by ICNIRP 2020. Three different heights corresponding to the exposed human body (110 cm, 150 cm and 170 cm) above the ground were measured for a period of 6 minutes each. At each location the average spatial intensity E_i of the electric field was recorded. The exposure ratios $\lambda_{i,f}$ for each height i and each frequency range f were calculated from the equation (1), where $E_{i,f}$, is the electric field strength at height i for frequency band f, and $E_{L,f}$ the electric field reference level at frequency bar 9 f. $\lambda_{i,f} = \left(\frac{E_{i,f}}{E_{L,f}}\right)^2 (1)$

$$\lambda_{i,f} = \left(\frac{E_{i,f}}{E_{L,f}}\right)^2 \ (1)$$

The average electric field for three heights intensity was also obtained from the spatial average electric field values at each height as follows:

$$E_{avg} = \sqrt{\frac{\sum_{i=3}^{3} E_i^2}{3}}$$
 (2)

The total Electric Field Strength was calculated to consider emissions from all sources in the range of 27 MHz-3 GHz:

$$I_{otal} = \sqrt{E_1^2 + \dots + E_N^2}$$
 (3)

 $f_{rotal} = \sqrt{E_1^2 + \dots + E_N^2}$ (3) The exposure ratio λ_f in the frequency band f is obtained as the mean value of the measurements over the three heights (equation 3).

$$\lambda_f = \frac{1}{3} \sum_{i=1}^{3} \overline{\lambda_{i,f}}$$
 (4)

Thereafter, the total exposure ratio Λ for the given measurement spot was derived as the sum of the exposure ratios λ_f in each frequency band f.

$$\Lambda_f = \sum_f \lambda_f(5)$$

Λ is used to estimate the exposure of the population to electromagnetic fields, compared to the safety limits as defined in the current legislation.

2.2 5G measurements procedure

Utilizing both theoretical insights and the innovative beamforming technique of 5G antennas, we performed measurements on 5G signal, at Karditsa and Bolos, cities in the Thessaly region. We perform 56 measurements with the same equipment (SRM 3006) as in 4G with a dynamic range of 0.14 mV/m to 160 V/m. In accordance with their established protocol, the laboratory recorded the 6-minute average and maximum electric field (E) values in distinct scenarios:

- A. "Active": Activating a user equipment (mobile phone) it commenced downloading 4K resolution YouTube content or/and performed a speed test.
- "Non-active": The measurements were taken while the mobile phone continued to remain active without downloading any data from the Internet.

The aim was to evaluate the variation of electric field strength by simulating a scenario where a non-active user is close to an active user.

The exposure stemming from 5G networks is anticipated to remain comfortably below the safety thresholds set by the ICNIRP 2020 guidelines, and this exposure level is comparable to that of older legacy technologies. This is facilitated by the beamforming phenomenon, which allows the electromagnetic field emitted by an antenna to be precisely

directed towards the user, leading to a substantial reduction in exposure levels beyond the targeted beam.

Numerous international organizations and reputable laboratories have verified these estimations through comprehensive 5G exposure assessments conducted in real-world environments. The University of Thessaly has contributed to this body of research by conducting measurements encompassing frequencies up to 6 GHz, which includes the present 5G spectrum. These measurements affirm [29] that the existing exposure levels remain consistent with those of legacy technologies and, crucially, remain well below the safety thresholds outlined by the ICNIRP 2020 guidelines.

2.3 Geospatial Services - Geographic Information System

Various methods can be used to obtain reliable data about the intensity of the distribution of electromagnetic fields affecting the environment. One of these methods is mathematical modeling or the use of data visualization techniques applying informational technologies. Geographic Information Systems (GIS) are powerful spatial information platforms that can be used to develop digital maps of various topologies, graphically visualize spatial geodata, and obtain additional necessary data about the objects under study. [4] They can integrate data from measurement tools and maps to support monitoring activities, help to identify and mitigate hazardous situations and convince to ensure a suitable quality of life by monitoring electromagnetic fields (EMF) from sources such as powerines and base stations. [6] When utilizing GIS, the outcome is usually an electromagnetic environment map, that can be seen as an abstract description of the electromagnetic spectrum environment with geographic information. The electromagnetic environment map is mainly constructed with various spatial interpolation algorithms, which can be classified into spatial statistics, spatial geometry, and function. Spatial statistics algorithms include Kriging. [26] Kriging is a stochastic spatial interpolation method that estimates the plue of a phenomenon at unsampled locations. It does this by using a linear combination of observations of the phenomenon in the vicinity of the desired location. The weights of the linear combination are chosen to minimize the variance of the estimate. [12] It provides the best linear unbiased estimates and information about the distribution of the estimation error, and it has strong statistical advantages over other interpolation techniques. [30]

The equation used for Kriging Spatial interpolation is:

$$z(x) = m + \sum_{i} w_i * z_i$$
(6)

where:

- z(x) is the estimated value at point x
- *m* is the mean of the observations
- w_i are the kriging weights
- z_i are the observed values at the neighboring points.

The estimated value at point x is equal to the mean of the observations plus the weighted sum of the observed values at the neighboring points.

The kriging weights are calculated using the equation:

$$w_i = \left(\frac{1}{\sigma^2}\right) * \sum_j (z_i - m) * R(x - x_j)$$
(7)

where:

• σ^2 is the variance of the observations

R(x - x_j) is the semivariogram at the lag between point x and point x_j

The semivariogram is a measure of the spatial correlation between observations. It is calculated as the average of the squared differences between pairs of observations at a given lag.

APPLICATION STUDY: Region of Thessaly


In the present study, the effect of mobile electromagnetic radiation on the human population in three different cities (Larissa, Karditsa, Volos) was calculated using the proposed framework. The measurements were conducted in schools of several educational levels across the three cities of Thessaly to demonstrate a safe and conductive learning environment for students physical and enotional health. The measurements were performed by SRM-3006 to 16 aluate radiofrequency exposure (27-3000 MHz and 27 MHz to 6 GHz) in areas of sensitive land use. A two hundred and twenty (220) measurements were carried out at the three cities of Thessaly and several urban/rural locations.

The following maps depict:

- a) in bold color, the cities' surface and municipal boundaries, and
- with red flags, the locations of base stations that affect the measurement points.

It was considered that, according to the inverse square law, antennas located at least 1000 meters away from the measurement point do not pose a significant exposure risk to the measurements.



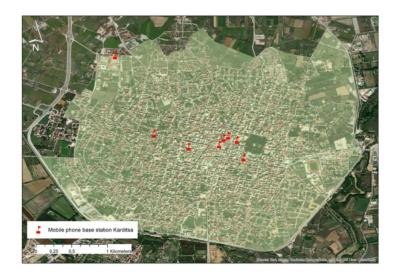

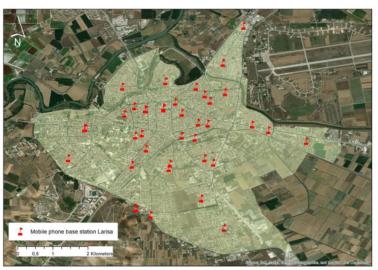


Figure 1. Base stations of the three Thessaly cities.

In order to create the electromagnetic environment maps, using the ArcGIS 10.8.1 software, each city was divided into polygon areas with defined boundaries, with regard to city block density and main roads. A polygon shapefile for each city was created.

Because the measurements of electromagnetic radiation in the areas were not continuous, Ordinary Kriging Interpolation in ArcGIS 10.8.1, was utilized to create continuous raster files for the three cities for 4G and 5G (when available) radiation. For the creation of the final maps, we calculated the average RF value for each polygon for every city for 4G and 5G radiation, using Zonal Statistics in ArcGIS 10.8.1. The values were then joined with the attribute table (database) of the polygon shapefile, for each city. The final maps are visualizations of the spatial distribution

of the electromagnetic radiation, which can be used to evaluate the radiation levels at the cities (Figure 2).



Figure 2. Map development process.

3. Results

3.1. Measurements before installation of 5G

Before the installation of 5G, measurements conducted in the Thessaly region, in all cities (Larisa, Karditsa, Volos) showed an mean exposure ratio of 0.0003, with a median value of 0.0001.

Table 1. RF Exposure Index for 4G electromagnetic radiation.

	Median	Mean
before	0,0001	0,0003

¹ Tables may have a footer.

3.2 Measurements after installation of 5G

After the installation of 5G, measurements were conducted in the Thessaly region, specifically in the cities of Karditsa and Volos. The measurements were performed in two ways. Initially, with the mobile data actively in use (YouTube 4K 2 deo), and then at the same location with the mobile data turned off. The mean and median values of the exposure ratios were calculated in Excel, and as observed in Table 2, they are the same

Table 2. RF Exposure Index for 5G electromagnetic radiation.

	Median	Mean
active	0,0008	0,0008
Non_active	0,0008	0,0008

¹ Tables may have a footer.

In Figures 3 and 4, the field strength and median values are represented before and after 5G activation for each point.

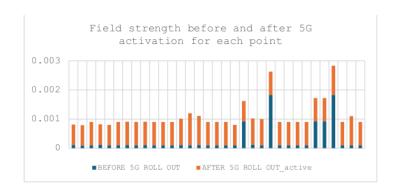


Figure 3. Field strength before and after 5G activation for each point.

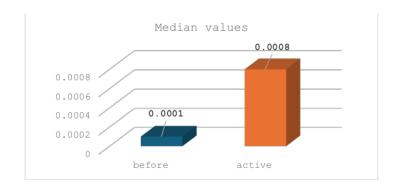


Figure 4. Median values before and after 5G installation.

Mood's Median test was conducted using SPSS for two groups of data:

- · before and non-active
- before and active

The significant level for both tests are α = 0.05.

At the group before and non-active the p-value was 0.24 and the hypothesis was the following:

If $p>\alpha$ then no significant difference between the two samples. In other case ($p<\alpha$) then the two samples are different.

In this case $p > \alpha$ and there is no difference between before and non-active groups.

(Figure 5)

Median Test

Frequencies

			groups		
			1,00	2,00	
befe	ore_nonactive	> Median	5	10	
		<= Median	28	23	

Test Statistics^a

		befeore_nonac tive
N		66
Median		,0008
Chi-Square		2,157
df		1
Asymp. Sig.		,142
Yates' Continuity Correction	Chi-Square	1,380
	df	1
	Asymp. Sig.	,240

a. Grouping Variable: groups

Figure 5. Mood's Median test for before and non-active groups.

At the group before and active the p-value was less than 0.001 and the hypothesis was the following:

If $p > \alpha$ then no significant difference between the two samples. In other case $(p < \alpha)$ then the two samples are different.

In this case $p \le \alpha$ and there is difference between before and active groups.

(Figure 6)

This difference is because of 5G. For the 5G case, the difference in the two medians is 8 times higher than the non-active group. But, focusing on the real concern, (health and safety limits compliance) the two values are equal, too low and in the background levels.

Median Test

Frequencies

		GROUPS		
		1,00	2,00	
BEFORE_ACTIVE	> Median	5	27	
	<= Median	28	6	

Test Statistics^a

		BEFORE_ACTI VE
N		66
Median		,0007
Chi-Square		29,360
df		1
Asymp. Sig.		<,001
Yates' Continuity Correction	Chi-Square	26,752
	df	1
	Asymp. Sig.	<,001
a Crouning Variable: CDO	LIDE	


a. Grouping Variable: GROUPS

Figure 6. Mood's Median test for before and active groups.

3.3 Georeference demonstration

Continuous monitoring and assessment are conducted to confirm compliance with these safety standards, providing reassurance to the community that schools in Thessaly are safe environments regarding to electromagnetic radiation. Mobile phones emit Non-Ionizing radiation, which is generally considered safe at the levels used in everyday communication. Parents, students, and school staff can be confident that their well-being is a top priority, and the use of mobile devices and communication infrastructure poses no substantial health risks in these urban areas of Thessaly.


Likewise, base stations are designed and operated to minimize any potential exposure risks to nearby residents, including students attending schools. This stems from the fact that having a greater number of towers allows for a reduction in the power output of each individual tower, resulting in an overall decrease in the electromagnetic radiation in the environment.

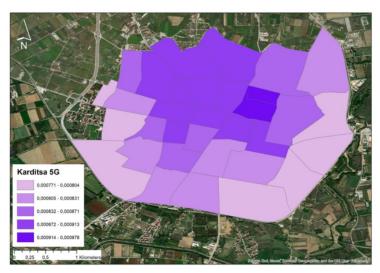





(b)

Figure 7. Electromagnetic radiation exposure after 5G installation: (a) City of Karditsa; (b) City of Volos

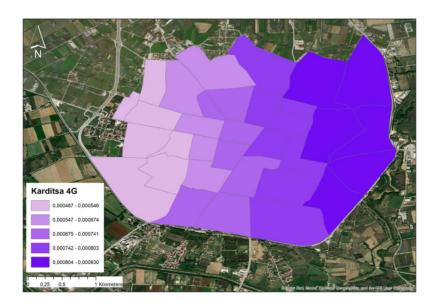

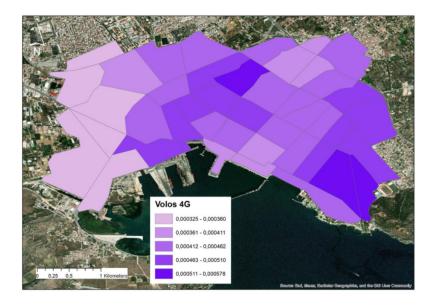

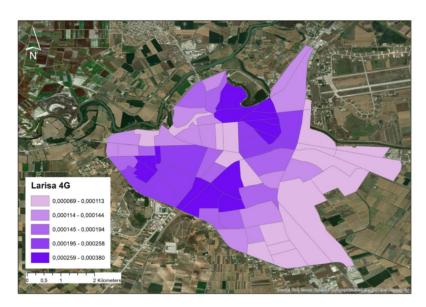

 $\textbf{Figure 8.} \ \ \text{Distribution of 4G exposure in Karditsa, Larissa and Volos.}$

The presence of more mobile phone towers indeed corresponds to lower levels of radiation exposure, a principle that is supported by our measurements in Thessaly. This phenomenon is a result of the distributed network of towers, which allows for the transmission of signals at reduced power levels from each individual tower. As a result, the cumulative electromagnetic radiation in the area is minimized, ensuring that the levels of exposure to the population are well within established safety limits. Our measurements in Thessaly confirm that this approach

effectively maintains both the quality of mobile phone services and the safety of the local community by keeping radiation levels at a minimum.

4. Discussion

In this section, we provide an overview of several RF exposure surveys. These surveys serve the purpose of evaluating the RF exposure levels associated with 5G networks and antennas, comparing them with 4G. Additionally, the surveys aim to assess to newly established safety distances and determine compliance with the safety limits set by the International Commission on Non-Ionizing Radiation Protection (ICNIRP).

The UK's communications regulator, OFCOM (Office of Communications), conducted a technical report titled "Electromagnetic Field (EMF) measurements near 5G mobile phone base stations," last updated on 17 April 2020. [19], This report presents RF measurement results from 10 major UK cities, encompassing 22 locations. The measurements were carried out using the SRM-3006 analyzer with an electric field probe, operating within the frequency range of 420 MHz to 6 GHz, covering all mobile service generations (2G, 3G, 4G, and 5G). Key findings from this study, following the methodology standard IEC 62232:2017, indicate that EMF levels emanating from mobile phone base stations were consistently well below the limits specified in the ICNIRP Guidelines. [9]. The highest recorded EMF level was approximately only 1.5% of the gelevant guideline. Notably, 5G technology contributed minimally to the measured EMF legals at each location. Instead, the predominant contributors were previous generations of mobile technology, such as 2G, 3G, and 4G. In fact, the highest level observed within the 5G band represented just 0.039% of the relevant guideline. Subsequent reports from OFCOM have reaffirmed that RF exposure levels, both for 5G and the overall exposure, continue to remain at these low levels. These findings underscore the regulatory body's commitment to ensuring the safety of EMF exposure in the context of emerging 5G netw 55 ks.

The French regulatory body, ANFR (Agence Nationale des Frequences), has undertaken a comprehensive project to assess 5G exposure levels in France. This initiative involves comparing exposure values before and after the 5G rollout, evaluating potential increases in exposure due to the new technology, and ensuring compliance with the ICNIRP's safety limits. [5].

154 sites operate in 700 MHz band. 135 sites in 2100 MHz, and 1360 sites in the C-band (3500 MHz, or 3490 to 3800 MHz). Of the total of 1649 sites, 85% are located at urban areas, and 15% in rural environment.

The most recent report, issued in 2021, provides valuable insights:

f (MHz)	Before 5G rollout	After 5G rollout
700	Median exposure	<u>Median</u> exposure
	0.16 V/m (700 MHz)	0.19 V/m (700 MHz)
	0.46 V/m (broadband),	0.51 V/m (broadband),
	Maximum exposure	Maximum exposure
	2.09 V/m (700 MHz)	3.14 V/m (700 MHz)
	3.40 V/m (broadband)	4.50 V/m (broadband)
2100	Median exposure	Median exposure
	0.0 V/m (2100 MHz)	0.09 V/m (700 MHz)

	1.0 V/m (broadband),	1.01 V/m (broadband),
	Maximum exposure	Maximum exposure
	0.28 V/m (2100 MHz)	1.25 V/m (700 MHz)
	6.19 V/m (broadband)	5.41 V/m (broadband)
3500	Median exposure	Median exposure
	0.07 V/m (3500 MHz)	0.33 V/m (700 MHz)
	1.16 V/m (broadband),	1.18 V/m (broadband),
	Maximum exposure	Maximum exposure
	2.1 V/m (3500 MHz)	2.58 V/m (700 MHz)
	4.98 V/m (broadband)	4.33 V/m (broadband)

5. Conclusions

There is no significant risk of electromagnetic radiation from mobile phones and base stations in sensitive lands (schools, kindergarten etc) located in the cities of Thessaly at the current time. The recorded exposure values within the Thessaly region consistently remained below the internationally recommended benchmark levels established by the ICNIRP. Strict safety regulations and guidelines are in place to ensure that these technologies operate well below the established safety limits for electromagnetic radiation.

г.	Intensity	Equivalent plane wave power
Frequecies	Eoo,i (V/m)	density Seq (W/m2)
8 100 kHz – 10 MHz	$72,8/\sqrt{f}$	H
10 - 400 MHz	23,4	1,4
400 – 2000 MHz	$_{1,15}\sqrt{f}$	f/286
2 – 300 GHz	51	7

In Greece, the limits are stricted and the ICNIRP's limits. The above table represents reference levels of electromagnetic fields in the frequency range of 100 kHz – 300 GHz, as derived after the application of the reduction factor 0.7 (defined in paragraph 9 of article 30 of Law 4070, Government Gazette 82/A/10-04-2012), on the exposure limits (referred to in articles 2-4 of Ministerial Decision No. 53571/3839/6.9.2000).

The growing unease surrounding electromagnetic fields, especially at 5G and their potential health effects has become a significant issue for society. Therefore, it is crucial to emphasize the importance of electromagnetic radiation measurements. These measurements serve as a vital tool for addressing these concerns and providing valuable data that can help inform policies and regulations.

Author Contributions: All authors contributed equally to this work.

Funding: This research was funded by Princess Nourah bint Abdulrahman University Researchers Supporting Project, Grant No. PNURSP2023R12".

Acknowledgments: The authors express their gratitude to Princess Nourah bint Abdulrahman University Researchers Supporting Project (Grant No. PNURSP2023R12), Princess Nourah bint Abdulrahman University, Riyadh,

Conflicts of Interest: The authors declare no conflict of interest.

References

- Alexias, A., Kiouvrekis, Y., Softa, V., Kappas, C., Tyrakis, C., Theodorou, K., 2020. RF-EMF Exposure levels in sensitive land use in Greece: Educational units census in the municipality of Korydallos. Radiat Prot Dosimetry. 190, 193-199. https://doi.org/10.1093/rpd/ncaa090.
- Al-Sahly, A., Hassan, M.M., Al-Rubaian, M., Al-Qurishi, M., 04-06 April, 2018. Using GIS for Measuring Mobile Tower Radiation on Human. In Proceedings of the 1st International Conference on Computer Applications & Information Security. Riyadh, Kingdom of Saudi Arabia.
- Barrile, V., Bilotta, G., Capua, F.D., 2009. GIS for calculating electromagnetic field. In Proceedings of the 2nd WSEAS International Conference on URBAN PLANNING and TRANSPORTATION. Rodos, Greece in July pp. 22-24.
- Faiz, N.S., Satayev, M.I., Berdaliyeva, A.A., Azimov, A.M., Shapalov, Sh.K., Nikonov, O.Ya., 2023. THE ROLE GIS IN THE ASSESMENT OF ELECTROMAGNETIC RADIATION ON THE EXAMPLE OF A RESIDENTAL AREA. Scientific journal «Reports of NAS RK». 2, 87–93.
- French National Agency of Frequencies (ANFR). (2021). https://www.anfr.fr/fileadmin/mediatheque/documents/5G/20211214-exposition-5G-EN.pdf
- Ghosh, S., Dasgupta, A., Ghosh, S.K. 2011. A geospatial framework for mapping of electromagnetic radiations. In Proceedings of the 2nd International Conference on Computing for Geospatial Research & Applications (COM.Geo '11). Association for Computing Machinery, New York, NY, USA.
- Groves, F.D., Page, W.F., Gridle, G., Lisimaque, L., Stewart, P.A., Tarone, R.E., Gail, M.H., Boice, Jr., J.D., Beebe, G.W., 2002. Cancer in Korean War Navy Technicians: Mortality Survey after 40 Years. American Journal of Epidemiology. 155, 810–818. https://doi.org/10.1093/aje/155.9.810.
- Gonzalez-Rubio, J., Najera, A., Arribas, E., 2016. Comprehensive personal RF-EMF exposure map and its potential use in epidemiological studies. Environmental Research. 149, 105-112. https://doi.org/10.1016/j.envres.2016.05.010.
- IEC 62232. Determination of RF field Strength, Power Density and SAR in the Vicinity of Radiocommunication Base Stations for the Purpose of Evaluating Human Exposure. IEC (International Electrotechnical Commission) Editions 2017, [online], https://webstore. iec.ch/publication/28673
- International Agency for Research on Cancer, 2013. Non-Ionizing Radiation, Part 2: Radiofrequency Electromagnetic Fields. https://www.ncbi.nlm.nih.gov/books/NBK304630/ (accessed
- International Commission on Non-Ionizing Protection (ICNIRP), 2020. Guidelines for limiting exposure to electromagnetic fields (100 KHZ TO 300 GHZ). Health Physics. 118, 483–524. https://doi.org/10.1097/HP.000000000001210.
- Jawad, O., Lautru, D., Benlarbi-Delai, A., Dricot, J.M., De Doncker, P., 2014. Study of Human Exposure Using Kriging Method. Progress In Electromagnetics Research B. 61, 241-252. doi:10.2528/PIERB14072907.
- Kiouvrekis, Y., Manios, G., Tsitsia, V., Gourzoulidis, G., Kappas, C., 2020. A statistical analysis for RF-EMF exposure levels in sensitive land use: A novel study in Greek primary and secondary education schools. Environ Res. 191, 109940. https://doi.org/10.1016/j.envres.2020.109940.
- Lagorio, S., Blettner, M.; Baaken, D., Feychting, M., Karipidis, K., Loney, T., Orsini, N., Röösli, M., Paulo, M.S., Elwoodl, M., 2021. The effect of exposure to radiofrequency fields on cancer risk in the general and working population: A protocol for a systematic review of human observational studies. Environ Int. 157, 106878
- Lönn, S., Ahlbom, A., Hall, P., Feychting, M., Swedish Interphone Study Group, 2005. Long-Term Mobile Phone Use and Brain Tumor Risk. American J of Epidemiology. 161, 526-535. https://doi.org/10.1093/aje/kwi091.
- Muheidat, F., Dajani, K., Tawalbeh, A.L., 2022. Security Concerns for 5G/6G Mobile Network Technology and Quantum Communication. Procedia Computer Science. 203, 32-40. https://doi.org/10.1016/j.procs.2022.07.007.
- Nguyen, A., Crespi, C.M., Vergara X., Kheifets, L., 2023. Pesticides as a potential independent childhood leukemia risk factor and as a potential confounder for electromagnetic fields exposure. Environmental Research. 238, 116899. https://doi.org/10.1016/j.envres.2023.116899.
- Nuckols, J.R., Ward, M.H., Jarup, L., 2004. Using Geographic Information Systems for Exposure Assessment in Environmental Epidemiology Studies. Environ Health Perspect. 112, 1007–1015. https://doi.org/10.1289/ehp.6738.
- Office of Communications (OFCOM). (2020). https://www.ofcom.org.uk/spectrum/information/mobile-operational-enquiries/mobile-base-station-audits

- Pesaresi, C., Pavia, D., 2021. Radio Base Stations and Electromagnetic Fields: GIS Applications and Models for Identifying Possible Risk Factors and Areas Exposed. Some Exemplifications in Rome. ISPRS Int. J. Geo-Inf. 10, 3.
- Ramirez-Vazquez, R., Arabasi, S., Al-Taani, H., Sbeih, S., Gonzalez-Rubio, J., Escobar, I., Arribas, E., 2020.
 Georeferencing of Personal Exposure to Radiofrequency Electromagnetic Fields from Wi-Fi in a University Area. Int. J. Environ. Res. Public Health. 17, 1998.
- Ramirez-Vazquez, R., Escobar, I., Thielens, A., Arribas, E., 2020. Measurements and Analysis of Personal Exposure to Radiofrequency Electromagnetic Fields at Outdoor and Indoor School Buildings: A Case Study at a Spanish School. IEEE. 8, 195692 – 195702
- Rinaldi, A.M., 2009. A GIS-based system for electromagnetic risk management in urban areas. Journal of Location Based Services. 3, 3-23. https://doi.org/10.1080/17489720902776720.
- Schüz, J., 2011. Exposure to extremely low-frequency magnetic fields and the risk of childhood cancer: Update
 of the epidemiological evidence. Progress in Biophysics and Molecular Biology. 107, 339–342.
 https://doi.org/10.1016/j.pbiomolbio.2011.09.008.
- Schüz, J., Jacobsen, R., Olsen, J.H., Boice, Jr., J.D., McLaughlin, J.K., Johansen, C., 2006. Cellular Telephone Use and Cancer Risk: Update of a Nationwide Danish Cohort. J. of the National Cancer Institute. 98, 1707-1713. https://doi.org/10.1093/inci/dji464.
- Shan, J., Shao, W., Xue, H., Xu, Y., Mao, D., 2018. The Method of Electromagnetic Environment Map Construction Based on Kriging Spatial Interpolation. International Conference on Information Systems and Computer Aided Education (ICISCAE), Changchun, China, pp. 212-217.
- Statista, 2023. Forecast number of mobile users worldwide from 2020 to 2025 (in billions). https://www.statista.com/statistics/218984/number-of-global-mobile-users-since-2010/ (accessed
- Takebayashi, T., Varsier, N.; Kikuchi, Y., Wake, K., Taki, M., Watanabe, S., Akiba, S., Yamaguchi, N., 2008.
 Mobile phone use, exposure to radiofrequency electromagnetic field, and brain tumor: a case-control study. British J of Cancer. 98, 652-659.
- 29. Tyrakis, C., 2023. A.B. (University of Thessaly, Larissa, Greece). Personal communication.
- Wang, J.F., Li, L.F., Christakos, G., 2009 Sampling and Kriging Spatial Means: Efficiency and Conditions. Sensors. 9, 5224-5240. https://doi.org/10.3390/s90705224.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of MDPI and/or the editor(s). MDPI and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.

GEOREF

ORIGINALITY REP	ORT					
18% SIMILARITY IN) DEX	14% INTERNET SOURCE	15 PUBLICA		8% STUDENT PA	APERS
PRIMARY SOURCE	ES					
	omitt ent Paper	ed to Univers	sity of The	essaly		4%
	W.Mo	dpi.com				2%
	vend net Sour	space.univer	n.ac.za			1 %
Dan Env Krig Inte Sys (ICI	nlei M vironi ging S ernat tems	n, Wei Shao, Mao. "The Me ment Map Co Spatial Interp ional Confer and Compu E), 2018	ethod of Elonstruction polation", in	lectrom n Basec 2018 nformat	agnetic d on tion	1 %
	dem net Sourc	ic.oup.com				1 %
\circ	ıka-n	anrk.kz				1 %
		Jawad, David an Michel Dr				1 %

Delai, Jean Michel Dricot, Philippe De Doncker.

"STUDY OF HUMAN EXPOSURE USING KRIGING METHOD", Progress In Electromagnetics Research B, 2014

Publication

8	paratiritirioemf.eeae.gr Internet Source	1 %
9	Alexias Aris, Kiouvrekis Yiannis, Softa Vasiliki, Kappas Constantin, Tyrakis Charilaos, Theodorou Kiki. "RF-EMF EXPOSURE LEVELS IN SENSITIVE LAND USE IN GREECE: EDUCATIONAL UNITS CENSUS IN THE MUNICIPALITY OF KORYDALLOS", Radiation Protection Dosimetry, 2020	1%
10	journals.plos.org Internet Source	<1%
11	ehtrust.org Internet Source	<1%
12	technodocbox.com Internet Source	<1%
13	www.readkong.com Internet Source	<1%
14	Brahim Selmaoui, Paul Mazet, Pierre-Baptiste Petit, Kihwea Kim, Donggeun Choi, René Seze. "Exposure of South Korean Population	<1%

to 5G Mobile Phone Networks (3.4–3.8 GHz)", Bioelectromagnetics, 2021

Publication

15	srilanka.factcrescendo.com Internet Source	<1%
16	Charilaos Tyrakis, Kiki Theodorou, Yiannis Kiouvrekis, Aris Alexias, Constantin Kappas. "Radiofrequency Exposure Levels in Greece", Bioelectromagnetics, 2023 Publication	<1%
17	Yiannis Kiouvrekis, Georgios Manios, Vasiliki Tsitsia, Georgios Gourzoulidis, Constantin Kappas. "A statistical analysis for RF-EMF exposure levels in sensitive land use: A novel study in Greek primary and secondary education schools", Environmental Research, 2020 Publication	<1%
18	Joe Wiart. "Radio-Frequency Human Exposure Assessment", Wiley, 2016 Publication	<1%
19	cdn.standards.iteh.ai Internet Source	<1%
20	biblio.ugent.be Internet Source	<1%
21	brightideas.houstontx.gov Internet Source	<1%

23

Sharfah Ratibah Tuan Mat, Mohd Faizal Ab Razak, Mohd Nizam Mohmad Kahar, Juliza Mohamad Arif, Azlee Zabidi. "Applying Bayesian probability for Android malware detection using permission features", 2021 International Conference on Software Engineering & Computer Systems and 4th International Conference on Computational Science and Information Management (ICSECS-ICOCSIM), 2021

<1%

Publication

24

mau.diva-portal.org

Internet Source

<1%

25

Cinzia, Calcabrini, Mancini Umberto, De Bellis Roberta, Diaz Anna Rita, Martinelli Maddalena, Cucchiarini Luigi, Sestili Piero, Stocchi Vilberto, and Potenza Lucia. "Effect of extremely low frequency electromagnetic fields on antioxidant activity in the human keratinocyte cell line NCTC 2544", Biotechnology and Applied Biochemistry, 2016.

Publication

26

Sanjay Sagar, Seid M. Adem, Benjamin Struchen, Sarah P. Loughran et al. "Comparison of radiofrequency

<1%

electromagnetic field exposure levels in different everyday microenvironments in an international context", Environment International, 2018

Publication



Raquel Ramirez-Vazquez, Isabel Escobar, Juan José Hurtado Moreno, Antonio Martínez-Plaza, Silvia Maffey, Enrique Arribas.
"Personal exposure from free Wi-Fi hotspots in downtown Mexico City", Environmental Science and Pollution Research, 2023

Publication

Exclude quotes On Exclude matches < 2 words

Exclude bibliography On